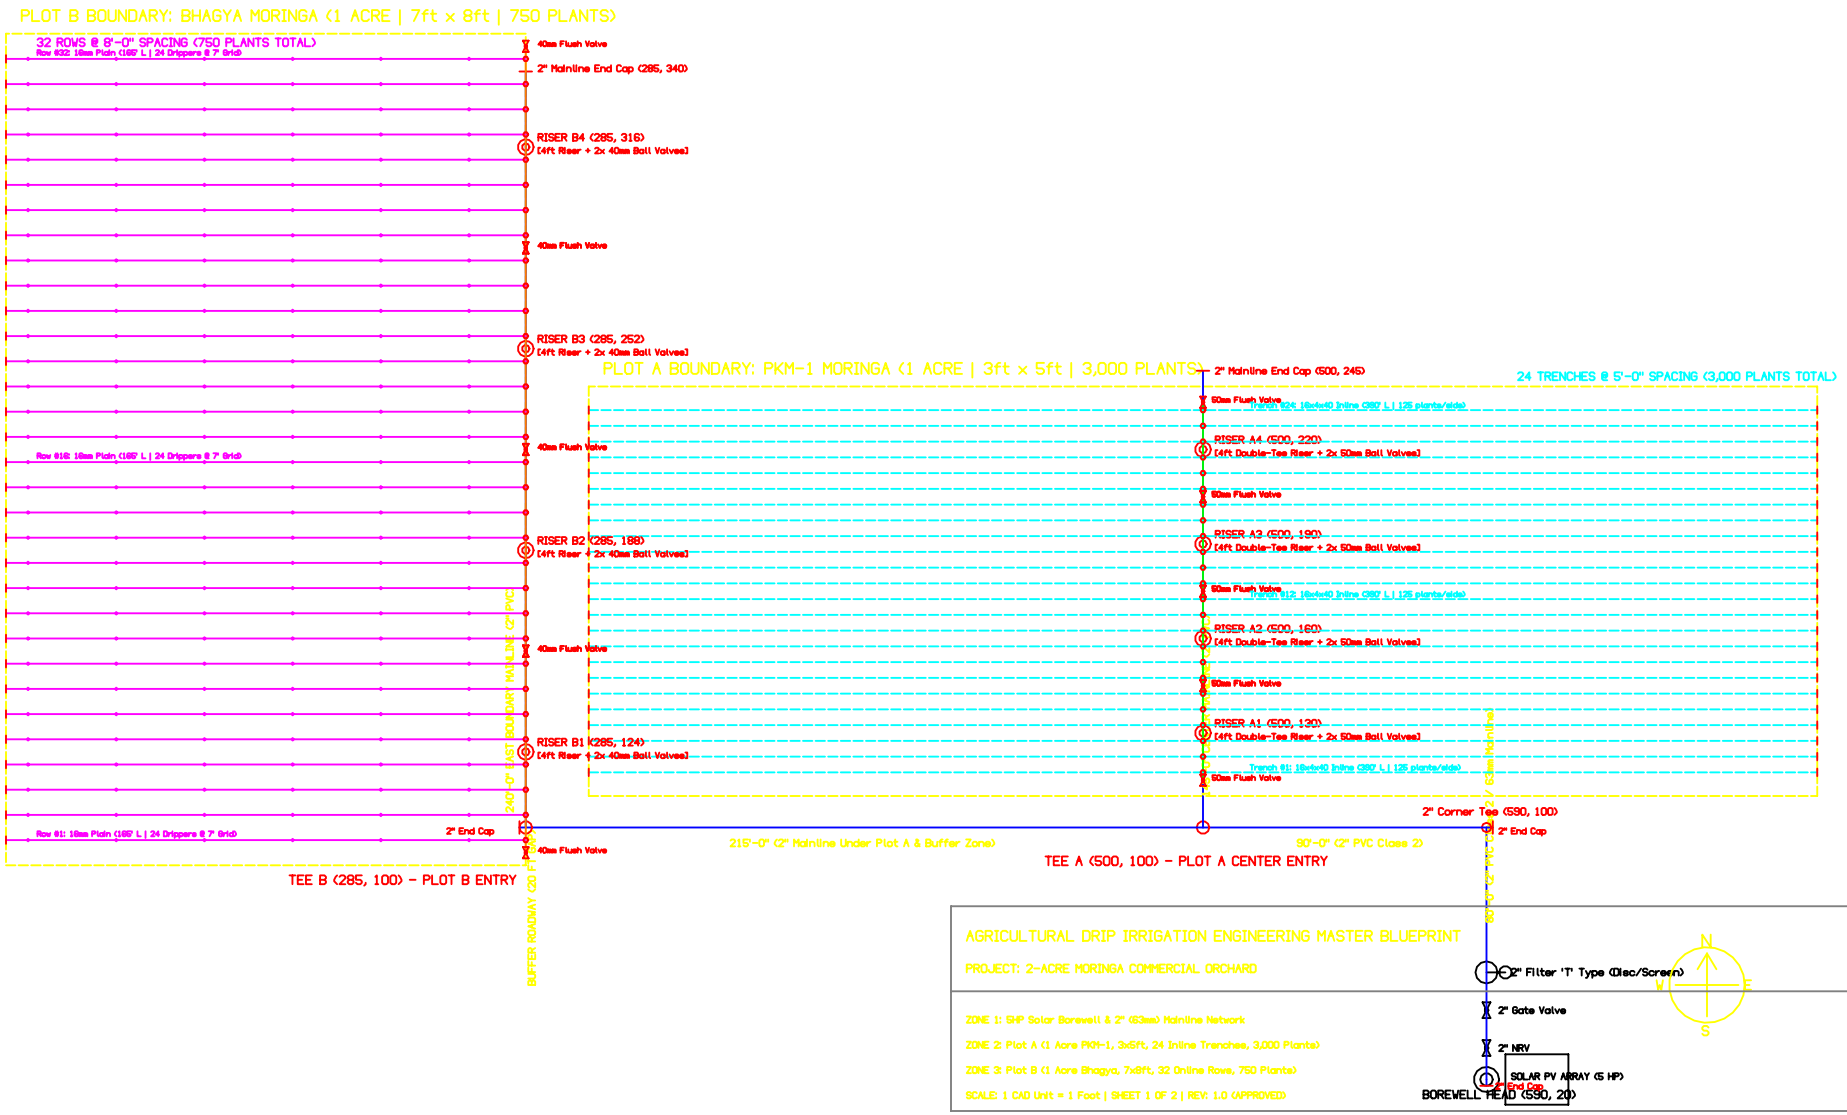

PLOT B BOUNDARY: BHAGYA MORINGA (1 ACRE | 7ft x 8ft | 750 PLANTS)
32 ROWS @ 8'-0" SPACING (750 PLANTS TOTAL)
Row #32: 16mm Plain (165' L | 24 Drippers @ 7' Grid)
Row #18: 16mm Plain (165' L | 24 Drippers @ 7' Grid)
Row #1: 16mm Plain (165' L | 24 Drippers @ 7' Grid)
40mm Flush Valve
2" Mainline End Cap (285, 340)
RISER B4 (285, 316)
[4ft Riser + 2x 40mm Ball Valves]
RISER B3 (285, 252)
[4ft Riser + 2x 40mm Ball Valves]
RISER B2 (285, 188)
[4ft Riser + 2x 40mm Ball Valves]
RISER B1 (285, 124)
[4ft Riser + 2x 40mm Ball Valves]
2" End Cap
240'-0" EAST BOUNDARY MAINLINE (2" PVC)
BUFFER ROADWAY (20' Fire Access)
TEE B (285, 100) – PLOT B ENTRY
PLOT A BOUNDARY: PKM-1 MORINGA (1 ACRE | 3ft x 5ft | 3,000 PLANTS)
24 TRENCHES @ 5'-0" SPACING (3,000 PLANTS TOTAL)
2" Mainline End Cap (500, 245)
50mm Flush Valve
Trench #24: 16x16x40 Inline GBP | 125 plants/side
RISER A4 (500, 220)
[4ft Double-Tee Riser + 2x 50mm Ball Valves]
RISER A3 (500, 190)
[4ft Double-Tee Riser + 2x 50mm Ball Valves]
Trench #12: 16x16x40 Inline GBP | 125 plants/side
RISER A2 (500, 160)
[4ft Double-Tee Riser + 2x 50mm Ball Valves]
RISER A1 (500, 130)
[4ft Double-Tee Riser + 2x 50mm Ball Valves]
Trench #1: 16x16x40 Inline GBP | 125 plants/side
215'-0" (2" Mainline Under Plot A & Buffer Zone)
90'-0" (2" PVC Class 2)
2" Corner Tee (590, 100)
2" End Cap
TEE A (500, 100) – PLOT A CENTER ENTRY
AGRICULTURAL DRIP IRRIGATION ENGINEERING MASTER BLUEPRINT
PROJECT: 2-ACRE MORINGA COMMERCIAL ORCHARD
ZONE 1: SHP Solar Borewell & 2" (63mm) Mainline Network
ZONE 2: Plot A (1 Acre PKM-1, 3x5ft, 24 Inline Trenches, 3,000 Plants)
ZONE 3: Plot B (1 Acre Bhagya, 7x8ft, 32 Online Rows, 750 Plants)
SCALE: 1 CAD Unit = 1 Foot | SHEET 1 OF 2 | REV: 1.0 (APPROVED)
2" Filter 'T' Type (Disc/Screen)
2" Gate Valve
2" NRV
SOLAR PV ARRAY (5 HP)
BOREWELL HEAD (590, 20)
N
S
E
W