
LATERAL TAKE-OFF & DRIP EMITTER ENGINEERING DETAILS

COMPARATIVE CROSS-SECTIONS: PLOT A (2-WAY INLINE) VS. PLOT B (1-WAY ONLINE TUNNING DRIPPER)

PLOT A: 50x16x2-WAY TAKE-OFF COLLAR (V-CONNECTOR)



16x4x40 INLINE DRIP TUBE INTERNAL STRUCTURE

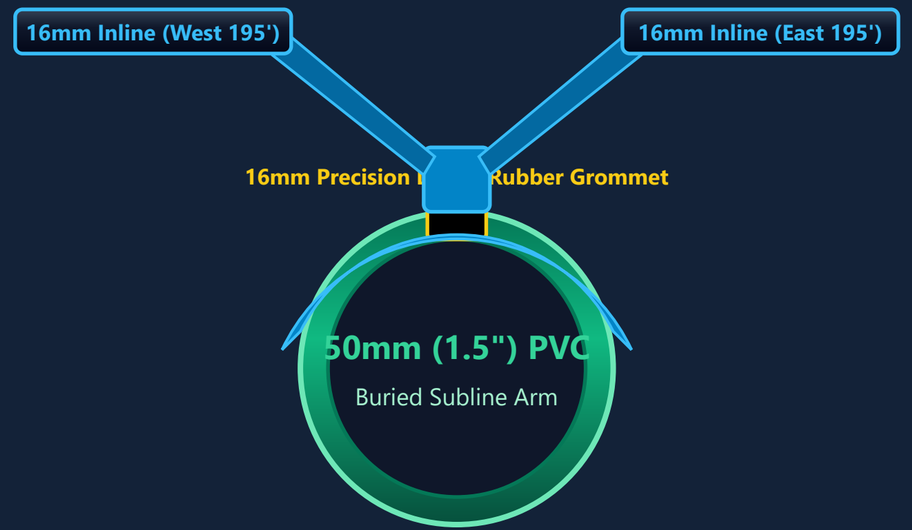


KEY SPECIFICATIONS & QUANTITIES:

- Collar Model: 50x16x2 Way Take of Coller (Item #9) — 24 used (1 spare)
- Drip Pipe: 16x4x40 Inline Pipe (Item #8) — 2,926m used (3,000m roll ordered)
- Spacing: 5 ft between trenches • 40cm dripper spacing • 3 ft plant spacing
- End Fittings: 16mm Endcap (Item #4) — 48 nos used (24 West + 24 East)
- **Total Plants Fed: 3,000 PKM-1 Moringa trees**

PLOT B: 40x16x1-WAY TAKE-OFF COLLAR & ON-LINE DRIPPER



ON-SITE PUNCHING & TUNNING DRIPPER (P) INSTALLATION



KEY SPECIFICATIONS & QUANTITIES:

- Collar Model: 40x16x1Way TF Coller (Item #6) — 32 used (3 spare)
- Plain Pipe: 16mm Pipe Mtrs (Item #1) — 1,610m used (2,000m roll ordered)
- Drippers: Tunning Dripper (P) (Item #2) — 768 used (800 nos ordered / 32 spare)
- Punching: 3mm Hole via Punching Tool (Item #3) — 5 tools for field crew
- **Total Plants Fed: 750 Bhagya Moringa trees (7x8ft commercial grid)**